


Boom Cover Measurements;

Sail Cover Measurements

Important Note - New sails are stiffer and they require more room in the sail cover than an old sail does.

Be sure to have loose measurements 8" below the boom

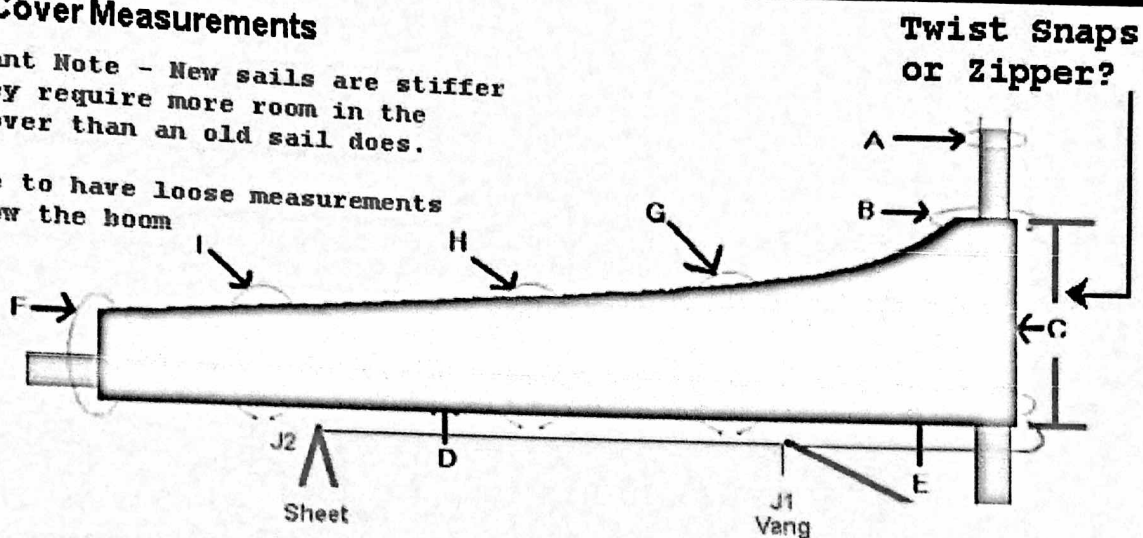

F, I, H, G and E are loose measurements 8" below the boom.
For Vessels 40' and larger use 10" below the boom.

- A= Circumference of mast above headboard
- B= Circumference Mast and Headboard
- C= Height of **Sail Cover**
- D= Length of Sailcover measured to forward centerline of mast
- E= Circumference at 45 Degrees
- F= Circumference at Clew including Clew Car if present
- G= Circumference of Sail at 1/4 of D
- H= Circumference of Sail at 1/2 of D
- I= Circumference of Sail at 3/4 of D

J1= Vang (fwd center of mast to location)
J2= Sheet (fwd center of mast to location)

Twist Snap or Zipper on C? *Zipper*
Twist Snaps or Zipper on D? *Zipper*

Please provide locations of Vang and Sheet so we will not put any fasteners in these locations.
Measure these from forward centerline of mast aft.

Twist Snaps
or Zipper?

mm
A=395
B=
C=790
D=3660
E=1770
F=460
G=1170
H=800
I=600
J1=1250
J2=3490

Click Below Link for Colors;

http://www.fareastsails.com/orderimages/weathermax_colors.html