
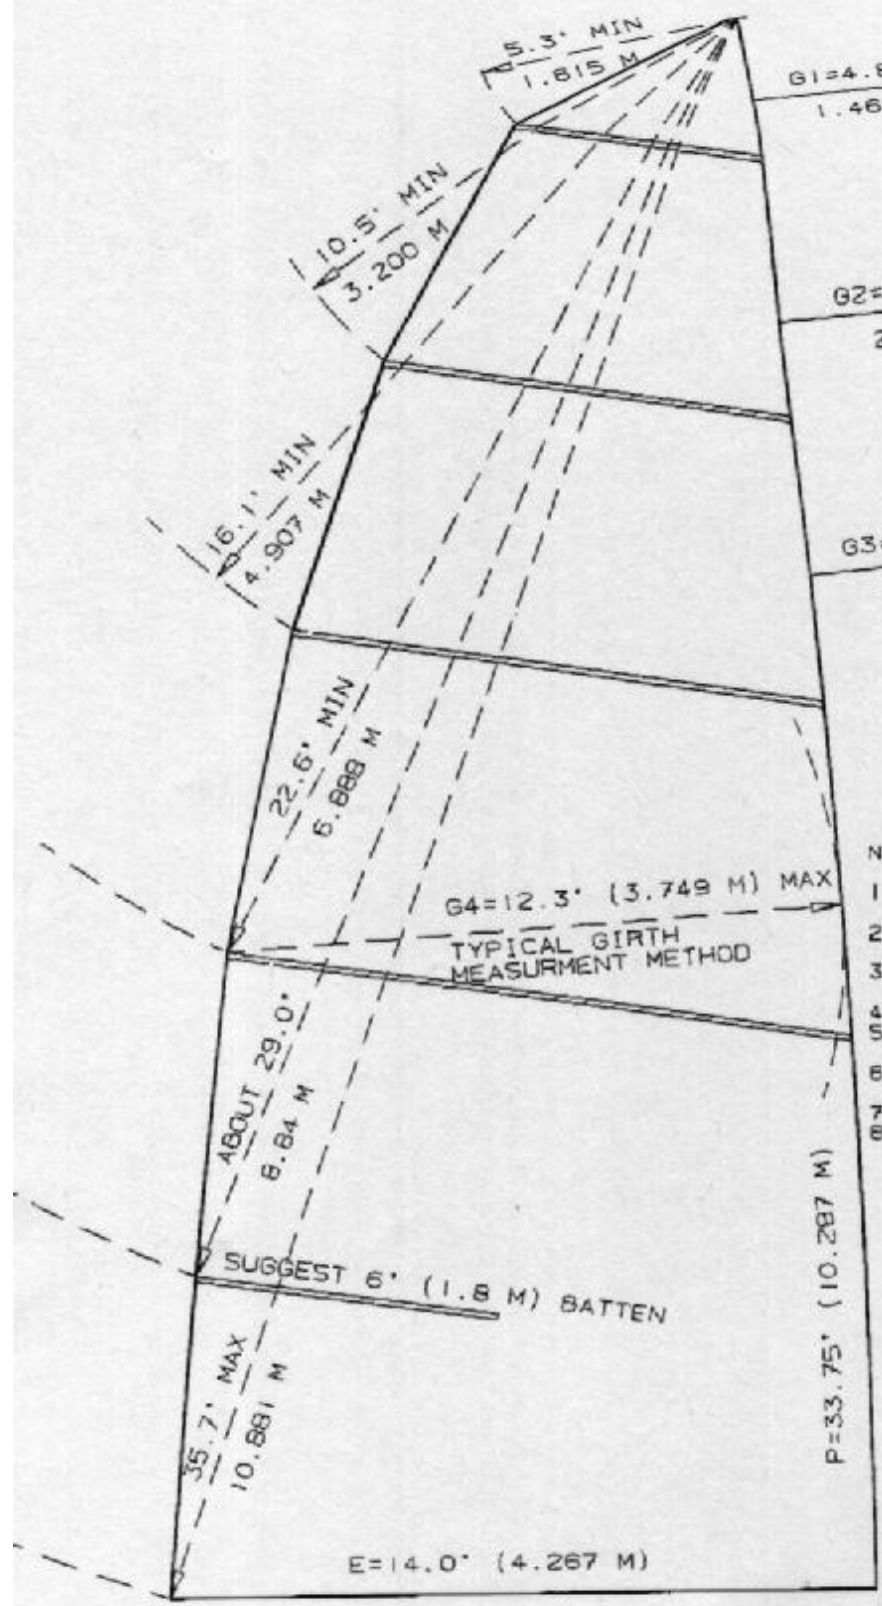



ANTRIM 27 CLASS MAINSAIL

9/9/97 JKA

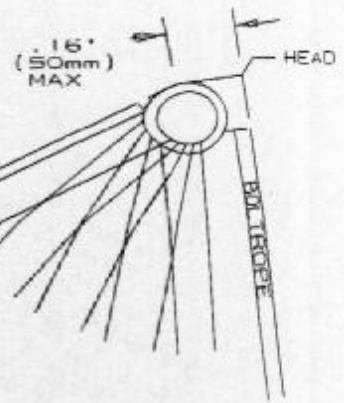

NOTES:

- 1 GIRTHS ARE MEASURED FROM LEECH AT TOP EDGE OF BATTEN POCKET AS SHOWN
- 2 GIRTH/BATTEN LOCATIONS ARE DETERMINED BY A RADIUS FROM HEAD.
- 3 GIRTHS ARE MEASURED FROM LEECH TO CLOSEST POINT OF LUFF INCLUDING BOLTROPE
- 4 SAIL IS MEASURED WITH BATTENS INSTALLED.
- 5 3 UPPER BATTENS ARE FULL LENGTH, LENGTH OF 2 LOWER BATTENS IS UNRESTRICTED
- 6 NO HEADBOARD IS ALLOWED
- 7 HEAD RING MAX DIAMETER IS 2" (50mm)
- 8 MEASURE BY IYRU RULES EXCEPT AS NOTED
- 9 MATERIAL IS NOT RESTRICTED

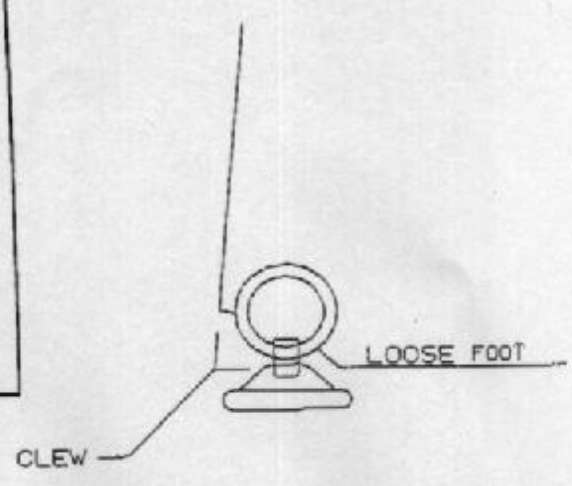


ANTRIM 27 CLASS JIB

9/9/97 JKA

NOTES:

- 1 DIMENSIONS ARE MAXIMUMS EXCEPT WHEN SUGGESTIONS
- 2 MEASURE BY IYRU RULES EXCEPT AS NOTED
- 3 MID GIRTH IS FROM MID POINT ON LEECH TO CLOSEST SOCK ON LUFF INCLUDING SOCK
- 4 LEECH IS STRAIGHT LINE FROM HEAD TO CLEW
- 5 FOOT IS STRAIGHT LINE FROM CLEW TO TACK
- 6 MATERIAL IS NOT RESTRICTED

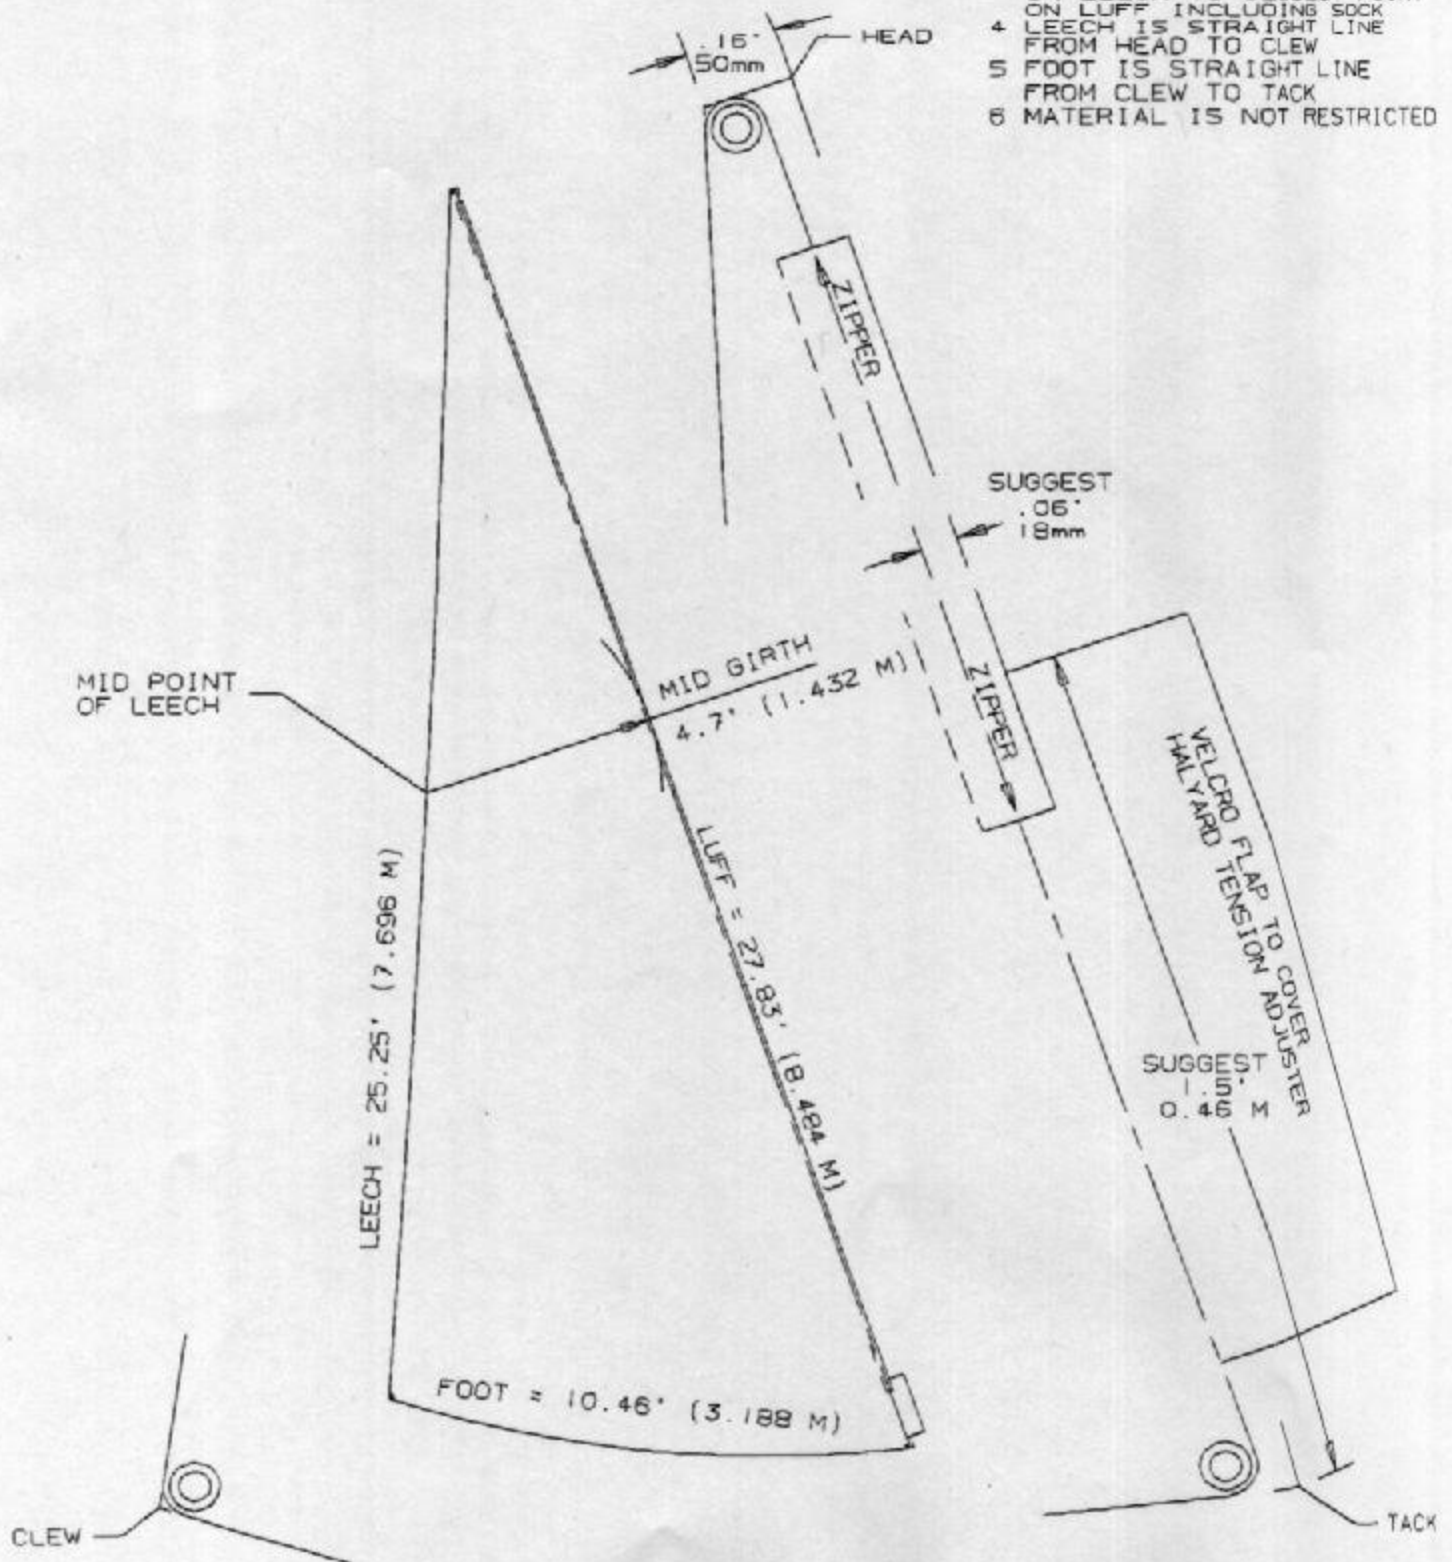

ANTRIM 27 CLASS SPINNAKER

9/9/97 JKA

NOTES:

- 1 G1, G2, AND G3 ARE GIRTHS MEASURED BETWEEN 3/4, 1/2, AND 1/4 POINTS ON LUFF AND LEECH AS SHOWN
- 2 STRAIGHT LINE DISTANCE FROM SPINNAKER HALYARD EXIT TO TACK LINE EXIT IS 40 FEET (12.19 M)
- 3 MEASURE BY IYRU RULES EXCEPT AS NOTED
- 4 MATERIAL IS NOT RESTRICTED, EXCEPT BY MINIMUM WEIGHT SPECIFIED IN RULE III.V.M.2
- 5 MAXIMUM SL1 IS 42.65 FT. (13.0 M)

